


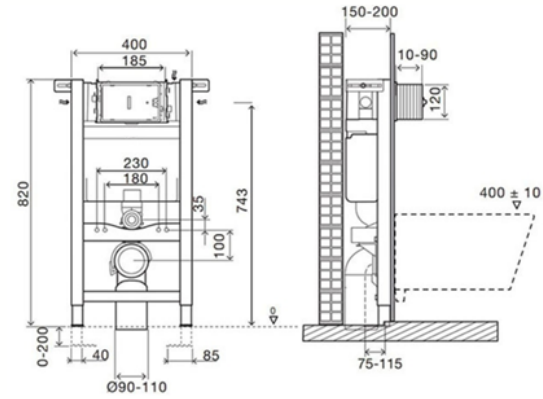

DB5521.P

DOLPHIN BLUE 126MM PNEUMATIC CISTERN - 820MM FRAME

- › Concealed WC cistern and frame
- › WELS and WaterMark Compliant
- › In painted profile corrosion resistant
- › Easy and quick installation with Fast Fit system
- › Minimum thickness of 150mm and adjustable up to 170mm
- › Height regulation of the adjustable floor brackets (0-200 mm);
- › Depth adjustable outlet bend
- › Tested for 400kg load
- › Dual flush in-wall cistern compatible with dual flush actuators 4.5/3 litres
- › 126mm thickness
- › Pneumatic actuation
- › Working pressure from 0.1 to 16 bar
- › Resistance to atmospheric humidity (Hr <90%).
- › Polypropylene (PP) cistern highly resistant and inalterable to thermal stress
- › Supplied with anti-condensation lining
- › Pre-assembled structure for installation in front of masonry wall and finish in light wall, plasterboard wall and technical support rail for light wall
- › The Dolphin Delayed Action Inlet Valve only opens and starts

PRODUCT CODES

- DB5521.E** - Electronic cistern with 820mm frame
- DB5520.E** - Electronic low height cistern without frame
- DB5511.E** - Electronic cistern with 1150mm frame
- DB5510.E** - Electronic cistern without frame
- DB5521.P** - Pneumatic cistern with 820mm frame
- DB5520.P** - Pneumatic low height cistern without frame
- DB5511.P** - Pneumatic cistern with 1150mm frame
- DB5510.P** - Pneumatic cistern without frame