



DC3075DDA

TOILET KITS

- › Full set with all items included for a working WC
- › Electronic actuation flush
- › Flush mounted recessed back box designed to enable install from the front of wall - opening in the final wall finish should be cut to the size of the flush plate, not to the size of the cistern opening
- › Must be installed above the height of the opened toilet seat and seat cover to avoid false activation issues
- › Pan & cistern weight tested to 400KG
- › Working pressure: 0.1 to 16 bar
- › Sensor activated dual flush volumes of 4.5/3 litres
- › Designed to be hardwired into 240v circuit - no battery option available
- › Optional bluetooth connection to Dolphin gateway device (to take you to BMS) to provide setting possibilities, diagnosis and usage statistics
- › 80mm minimum wall build up required
- › WaterMark Approved


PRODUCT CODES

Set includes:

DB5500.E.AU Electronic cistern

DB5580.E.I Brushed satin electronic flush plate

DC2006DDA Floor mounted toilet pan and seat


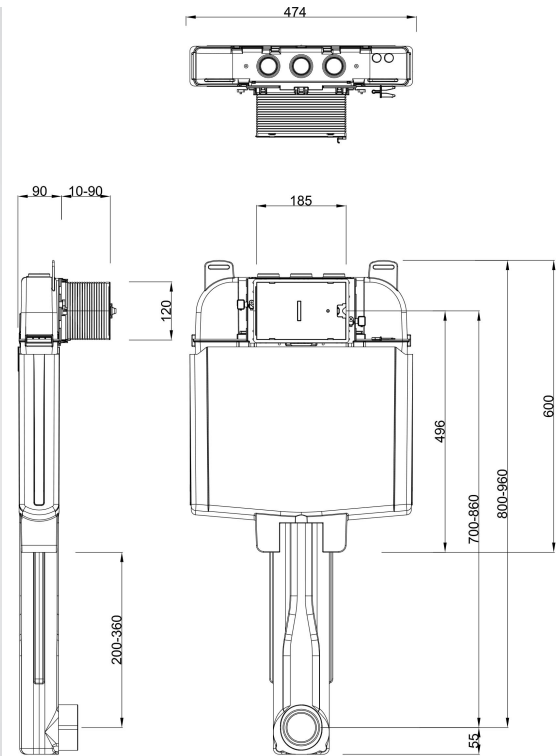


DB5500.E.AU

DOLPHIN SLIMLINE ELECTRONIC CISTERN - FRAMELESS

- > Concealed WC cistern for floor mounted/free standing WC pans
- > In painted profile corrosion resistant
- > Minimum thickness of 90mm
- > Depth adjustable outlet bend
- > Dual flush in-wall cistern compatible with dual flush actuators 4.5/3 litres
- > 80mm thickness (90mm when allowing for Ø90mm outlet bend)
- > Electronic actuation
- > Equipped with delayed refilling Inlet Valve, (can save 9 litres of water per day)
- > Working pressure from 0.1 to 16 bar
- > Resistance to atmospheric humidity (Hr <90%).
- > Polypropylene (PP) cistern highly resistant and inalterable to thermal stress
- > Supplied with anti-condensation lining
- > Pre-assembled structure for installation in front of masonry wall and finish in light wall, plasterboard wall and technical support rail for light wall
- > The Dolphin Delayed Action Inlet Valve only opens and starts to refill the cistern once the flush is complete and the flush valve is closed, saving up to 0.5 litres of water per flush
- > Compliant with WaterMark and WELS
- > Compatible with DB5590.E (Anti-vandal), DB5570.E and DB5580.E flush plates

HEIGHT	855-1015MM
WIDTH	474MM
RECESS DEPTH	90-180MM

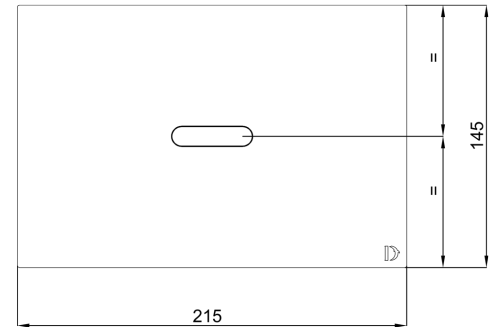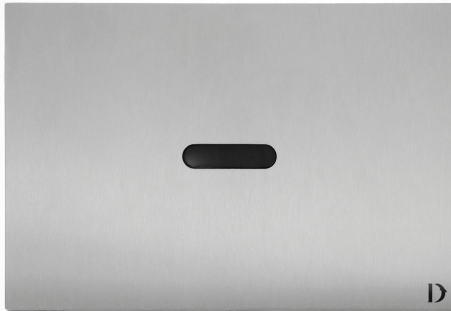

DB5580.E

DOLPHIN ELECTRONIC INFRARED FLUSH PLATE

- › High quality design for prestigious locations
- › Available to be powder coated in any RAL colour, and ceramic coated
- › Automatic dual flush (flush activated when user moves away from the toilet)
- › Designed to be hardwired into 240v circuit - no battery option available
- › Flush mounted recessed back box designed to enable install from the front of wall
- › Require Electronic version Dolphin cisterns (DB5510.E, DB5511.E) which comes with compatible motor already installed (currently not available on the short version 820mm cistern)
- › Red LED lights up to provide feedback that flush has been activated
- › Optional bluetooth connection to Dolphin App or gateway device (to take you to Dolphin cloud or BMS) to provide setting possibilities, diagnosis and usage statistics
- › Manual only available on request (users hand in close proximity, 1 second for short flush, 3 seconds for long flush), or manual and automatic (short or long flush based on length and proximity of the user in the sensor field) activation which can be changed manually at the sensor window, via the Dolphin app or preset by Dolphin according to specification
- › Optional radio version providing the option to flush the WC remotely from a radio transmitter
- › Cleaning mode settings (flush won't operate), hygiene flush settings, adjustable sensor range
- › Usage statistics via App, BMS or Dolphin cloud: Total no. of uses, Number of half and full flushes, Water consumption (estimated according to uses multiplied by flush volumes preset in the firmware – not actual consumption), Operating hours since first used, Average uses in last 30 days, Time since last use, Time since last hygiene flush
- › Compatible cisterns (not included) DB5510.E Electronic frameless cistern, DB5511.E Electronic cistern & frame

WIDTH	215MM
HEIGHT	145MM
PROJECTION	2MM

PRODUCT CODES

- DB5580.E** - Automatic Infrared flush sensor
- DB5570.E** - Mini automatic Infrared flush sensor
- Compatible cisterns
- DB5510.E** - Electronic frameless cistern
- DB5511.E** - Electronic cistern & frame

IMPORTANT NOTE: Access MUST be provide to the complete cistern including flush pipe, waste connection and plumbing connections including service valves etc to aid future servicing or leak resolution via a removable panel unless this flush plate is installed onto the front of the main cistern opening.

TECHNICAL HELPLINE 02 4966 8499
DOLPHINSOLUTIONS.COM