

DRYER MOUNTING TEMPLATE



Fix this card on the wall.

Drill 4 holes

(A. B. C. D. 8 mm diameter: 35 mm depth.)

'Unit should be mounted to give no less than 300mm clearance from the bottom of the unit to the nearest surface below'

8-27/64" (214 mm)

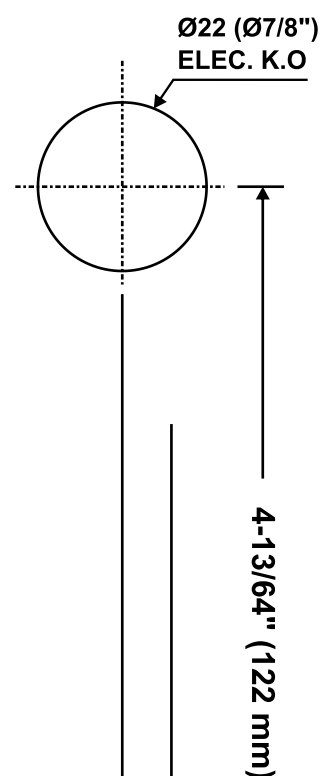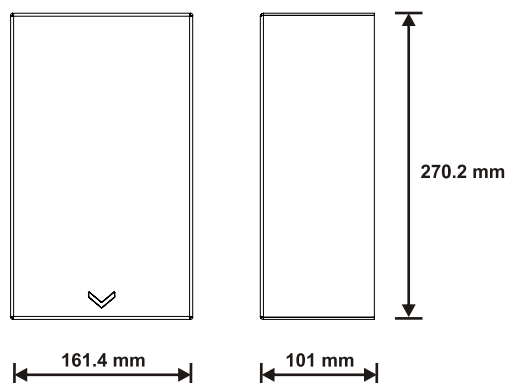

CONNECT DESCRIPTION

1. Secure the base plate on the wall provided.
2. The conduit in place by suitable 1/2 inch trade conduit fitting.
3. Connections:
 - A. Connect the live wire (colored black, brown or dark) to the terminal block marked "L".
 - B. Connect the neutral wire (colored white, blue or light) to the terminal block marked "N".
 - C. Connect the ground wire (colored green or green and yellow) to the terminal block marked "⊕".

Important Information

This Product falls within the scope of the Waste Electrical & Electronic Equipment Directive 2012/19/EU. (WEEE)



NOTE:

This Product should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority for recycling advice.

17/64" (6.5 mm)



THIS UNIT MUST BE FITTED AND SERVICED BY SUITABLY QUALIFIED PERSONNEL