


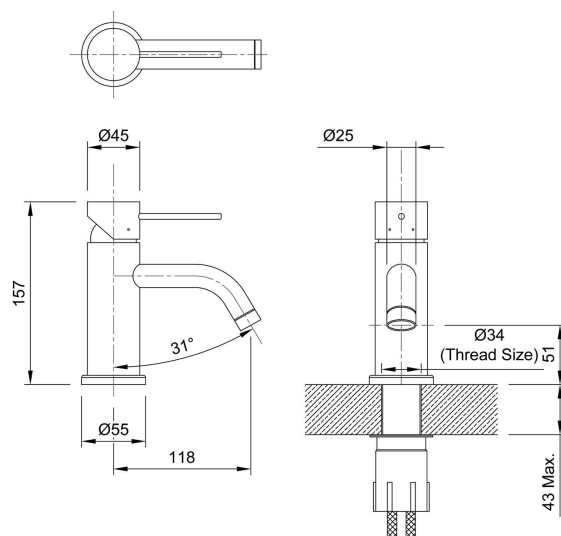

**DBI650**

## DOLPHIN MONOBLOC MIXER TAP

- › WRAS Approved product
- › Superior quality for prestigious washrooms
- › Solid stainless steel in a brushed finish
- › Single lever basin tap
- › Interchangeable STD M22/24 Neoperl Aerator insert
- › 2 inlet (hot and cold) water supply
- › Counter hole Ø 34-40mm
- › Maximum counter thickness 43mm
- › Inlet via 2 flexible connectors with 1/2" BSP connection
- › Max nominal flow rate of 3.5LPM (between 1 and 6 bar) as standard, and is also available with 1.25LPM and 1.75LPM flow rates on special request
- › We recommend our Dolphin Blue AL0220 TMV3 be used in conjunction with this Dolphin Blue tap
- › Exceeds the BREEAM requirements for taps for a maximum flow rate of less than 6 litres per minute (LPM) at a water pressure for 0.3 mega pascals (MPa)
- › Max water temperature 90°C
- › Max operating pressure 6.0 bar
- › The DBI650 is not compatible with Dolphin's DC34.3535 / DC34.4235 / DC34.5045 washbasins

|                      |              |
|----------------------|--------------|
| <b>HEIGHT</b>        | <b>157MM</b> |
| <b>DIAMETER</b>      | <b>45MM</b>  |
| <b>ROSE DIAMETER</b> | <b>55MM</b>  |
| <b>PROJECTION</b>    | <b>118MM</b> |

