


PRESTIGE DOC M SHOWER PACK – EXPOSED

(Click on product code or page number to view Datasheet)

DP6603	Page 2
DP6603 Pack contains:	
DP680300 Shower Curtain Rail x1	Page 3
BC5083-14L Shower Curtains x2	Page 4
BC5083-13 Shower Curtain Hooks x24	Page 5
DP600600 Grab Rail – 600mm x3	Page 6
DP600500 Grab Rail – 500mm x1	Page 7
DP670300 Hinged Drop Down Rail x2	Page 8
BC5083-34 Back Rest x1	Page 9
BC5083-33 Shower Seat x1	Page 10
BC5083-121 Alarm Pull Cord x1	Page 11
DP7102 Robe Hooks x2	Page 12
BC5083-101 Mirror 1000mm x 400mm x1	Page 13
BC5083-15 Exposed Shower Valve x1	Page 14
BC5083-16 Exposed Two-Way Diverter x1	Page 15
BC5083-20 Shower Riser Kit – Hand Held and Hose x1	Page 16
DB1032 Shower Head x1	Page 17
DP601001 Shower Riser Rail and Bracket x1	Page 18
BC5083-18 Copper Tube x1	Page 19

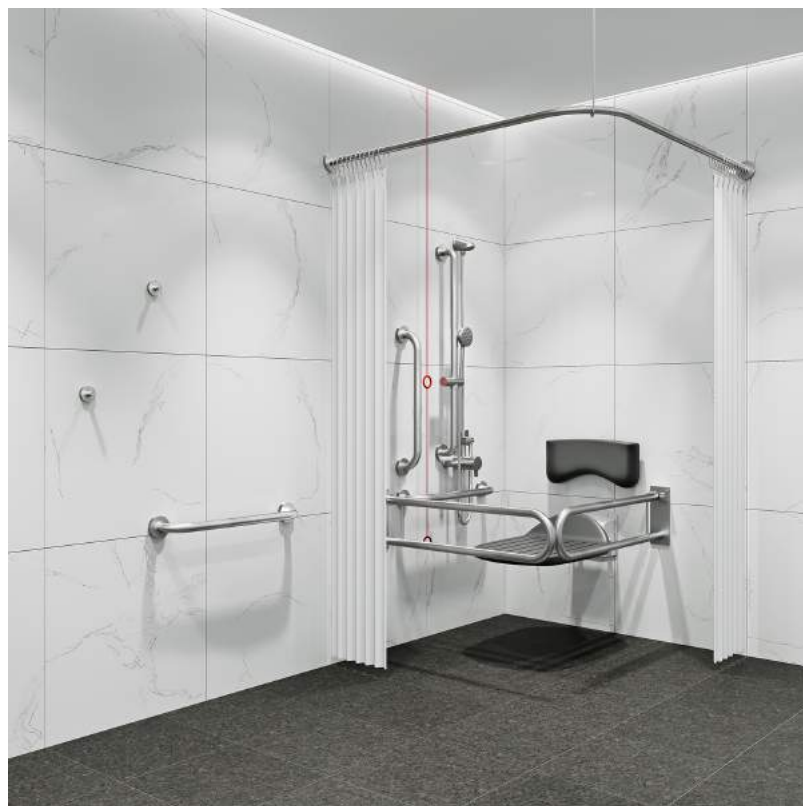



DP6603

DOLPHIN PRESTIGE DOC M SHOWER SET – EXPOSED

- › Compliant with Part M of the Building Regulations
- › Complete set includes all of the items listed below to ensure compliance from specification to installation
- › All items of a co-ordinated design to achieve a consistent aesthetic look throughout the washroom
- › Cost effective alternative to sourcing all items individually
- › Set is delivered in one package for easy installation
- › Includes handmade Prestige grab rails and accessories for ultimate durability
- › To assist blind or partially sighted persons in navigating the washroom there should be a contrast difference of 30 between the LRV (Light Reflective Value) of fixtures/fittings and surrounding surfaces as well as between floors, walls, doors and ceilings. Contact the Dolphin Technical Team for assistance
- › This pack uses TMV3 Certified valves
- › DP6603 Pack contains:
 - › DP680300 Shower Curtain Rail x1
 - › BC5083-14L Shower Curtains x2
 - › BC50830-13 Shower Curtain Hooks x24
 - › DP600600 Grab Rail – 600mm x3
 - › DP600500 Grab Rail – 500mm x1
- › DP670300 Hinged Drop Down Rail x2
- › BC5083-33 Shower Seat x1
- › BC5083-34 Back Rest x1
- › BC5083-121 Alarm Pull Cord x1
- › DP7102 Robe Hooks x2
- › BC5083-101 Mirror 1000mm x 400mm x1
- › BC5083-15 Exposed Shower Valve x1
- › BC5083-16 Exposed Two-Way Diverter x1
- › BC5083-20 Shower Riser Kit – Hand Held and Hose x1
- › DB1032 Shower Head x1
- › DP601001 Shower Riser Rail and Bracket x1
- › BC5083-18 Copper Tube x1
- › WRAS certification numbers
- › BC5083-15 : 1603305
- › BC5083-16 : 1509318
- › Flow Rates:
 - › BC5083-15 : 6 Litres per minute and 9 Litres per minute flow regulators both supplied, other flow rates available on special request

WELL



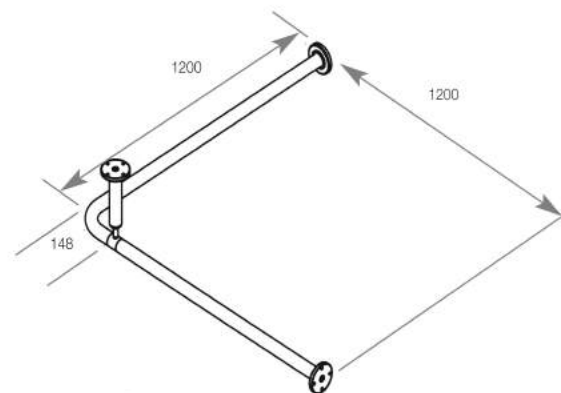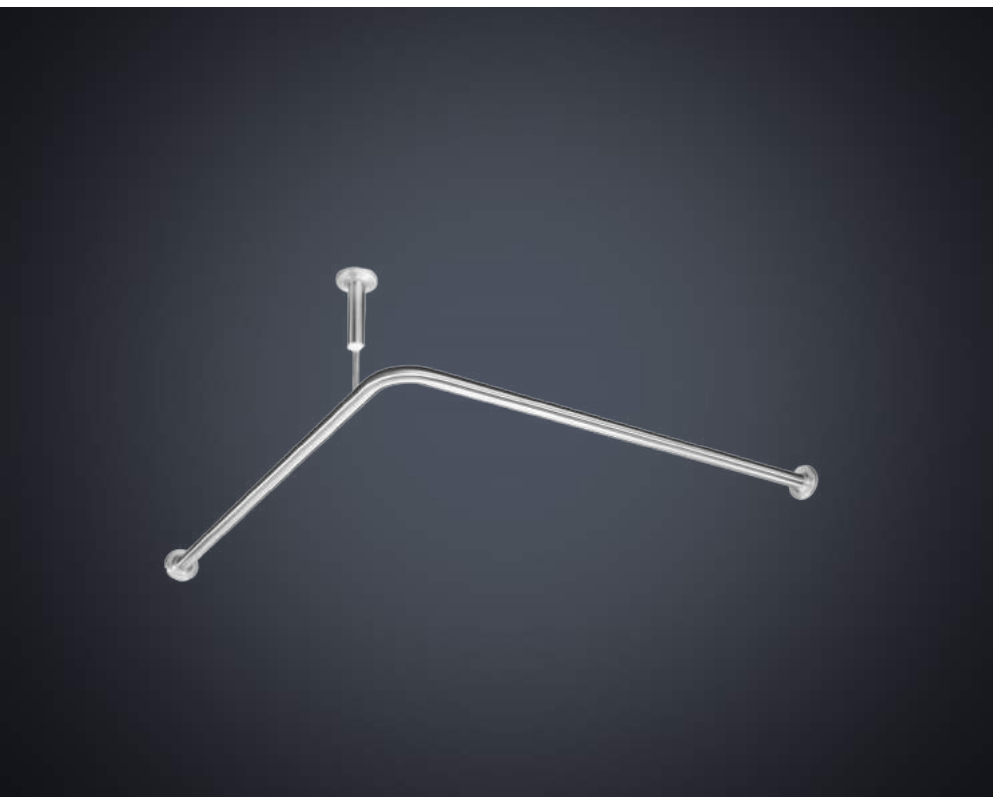


DP680300

DOLPHIN CORNER SHOWER CURTAIN RAIL

- › Corner Shower Curtain Rail*
- › Tubes are manufactured in a robust, easy to clean stainless steel, satin or textured finish
- › TUV certified in accordance with DIN EN 12182, and CE marked in accordance with 93/42 EEC
- › Capable of supporting up to 125kg
- › Outer diameter of tubes 32mm for an ergonomic grip
- › Bend radius of 75mm
- › Clearance from wall - 106mm
- › Four point wall mounting plates 4mm thick
- › Concealed fixings 75mm in diameter, anti-theft, with silicone sealing ring at tube joint

WIDTH	1200MM
PROJECTION	1200MM

*Ceiling stay not included

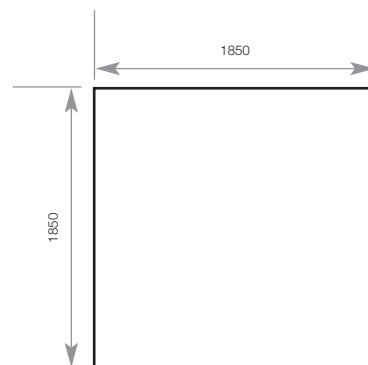

BC5083-14

DOLPHIN SHOWER CURTAIN

- › White shower curtain
- › 4oz weighted white polyester
- › Hooks are not included with curtain
- › 12 hooks required per curtain


HEIGHT	1830 MM
WIDTH	1830 MM



BC5083-13

DOLPHIN CURTAIN HOOKS BRASS CHROME PLATED

› Use with BC5083-11 Dolphin corner shower rail

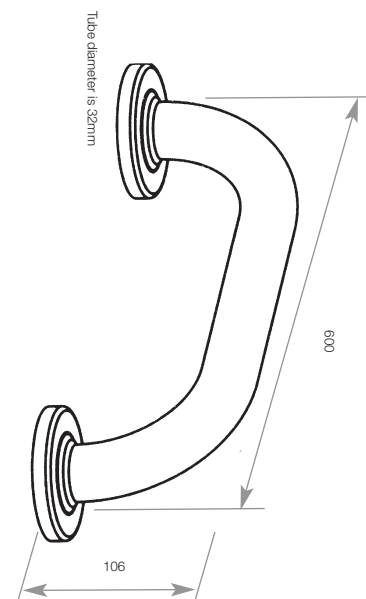

DP600600 / DP600610


DOLPHIN GRAB RAIL

- › Tubes are manufactured in a robust, easy to clean stainless steel, satin or textured finish
- › All rails TUV certified in accordance with DIN EN 12182, and CE marked in accordance with 93/42 EEC
- › All rails capable of supporting up to 125kg
- › Outer diameter of tubes 32mm for an ergonomic grip
- › Bend radius of 75mm
- › Clearance between rail and wall 74mm
- › Wall mounting - Grab rails with 4-point mounting plate - Support rails with 6-point mounting plate; all mounting plates 4mm thick
- › Concealed fixings 75mm in diameter; anti-theft, with silicone sealing ring at tube joint

HEIGHT	600 MM
DIAMETER	32 MM
PROJECTION	90 MM

PRODUCT CODES

› 300mm Brushed stainless steel	DP600300
› 300mm Textured stainless steel	DP600310
› 400mm Brushed stainless steel	DP600400
› 400mm Textured stainless steel	DP600410
› 500mm Brushed stainless steel	DP600500
› 500mm Textured stainless steel	DP600510
› 600mm Brushed stainless steel	DP600600
› 600mm Textured stainless steel	DP600610
› 1000mm Brushed stainless steel	DP601000
› 1000mm Textured stainless steel	DP601010

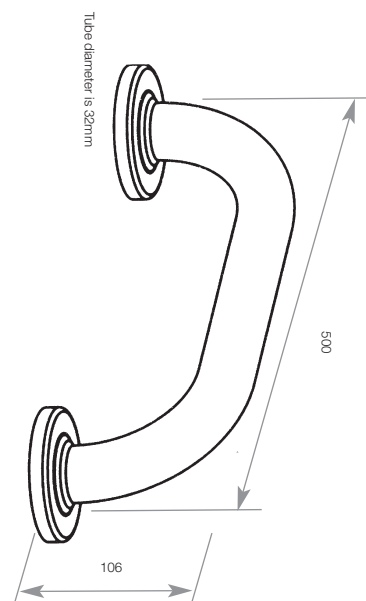

DP600500 / DP600510



DOLPHIN GRAB RAIL

- › Tubes are manufactured in a robust, easy to clean stainless steel, satin or textured finish
- › All rails TUV certified in accordance with DIN EN 12182, and CE marked in accordance with 93/42 EEC
- › All rails capable of supporting up to 125kg
- › Outer diameter of tubes 32mm for an ergonomic grip
- › Bend radius of 75mm
- › Clearance between rail and wall 74mm
- › Wall mounting - Grab rails with 4-point mounting plate - Support rails with 6-point mounting plate; all mounting plates 4mm thick
- › Concealed fixings 75mm in diameter; anti-theft, with silicone sealing ring at tube joint

HEIGHT	500 MM
DIAMETER	32 MM
PROJECTION	90 MM

PRODUCT CODES

› 300mm Brushed stainless steel	DP600300
› 300mm Textured stainless steel	DP600310
› 400mm Brushed stainless steel	DP600400
› 400mm Textured stainless steel	DP600410
› 500mm Brushed stainless steel	DP600500
› 500mm Textured stainless steel	DP600510
› 600mm Brushed stainless steel	DP600600
› 600mm Textured stainless steel	DP600610
› 1000mm Brushed stainless steel	DP601000
› 1000mm Textured stainless steel	DP601010

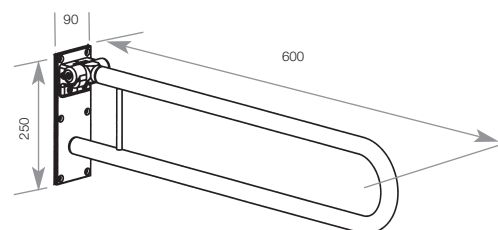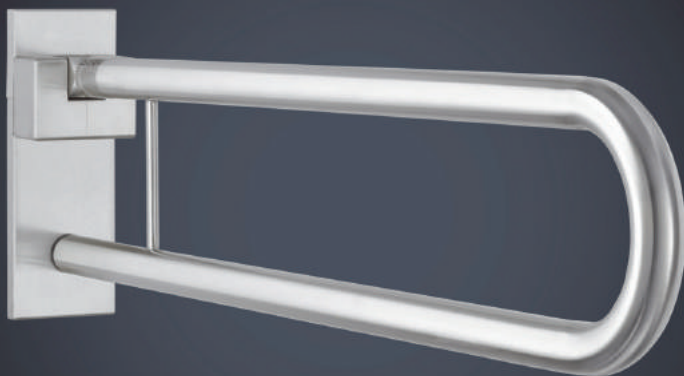

DP670100 / DP670110



DOLPHIN SUPPORT RAIL – HINGED

- › Hinged support rail
- › Tubes are manufactured in a robust, easy to clean stainless steel, satin or textured finish
- › All rails TUV certified in accordance with DIN EN 12182, and CE marked in accordance with 93/42 EEC
- › All rails capable of supporting up to 125kg
- › Outer diameter of tubes 32mm for an ergonomic grip
- › Bend radius of 75mm
- › Clearance from wall - 106mm
- › Wall mounting - Grab rails with 4-point mounting plate - Support rails with 6-point mounting plate; all mounting plates 4mm thick
- › Concealed fixings 75mm in diameter; anti-theft, with silicone sealing ring at tube joint

HEIGHT	250 MM
WIDTH	90 MM
PROJECTION	600 MM

PRODUCT CODES

› 600mm Satin stainless steel	DP670100
› 600mm Textured stainless steel	DP670110
› 700mm Satin stainless steel	DP670200
› 700mm Textured stainless steel	DP670210
› 850mm Satin stainless steel	DP670300
› 850mm Textured stainless steel	DP670310

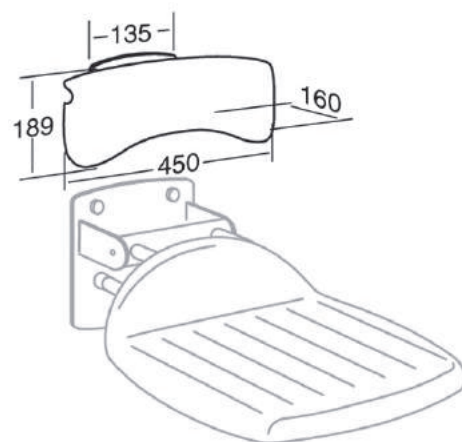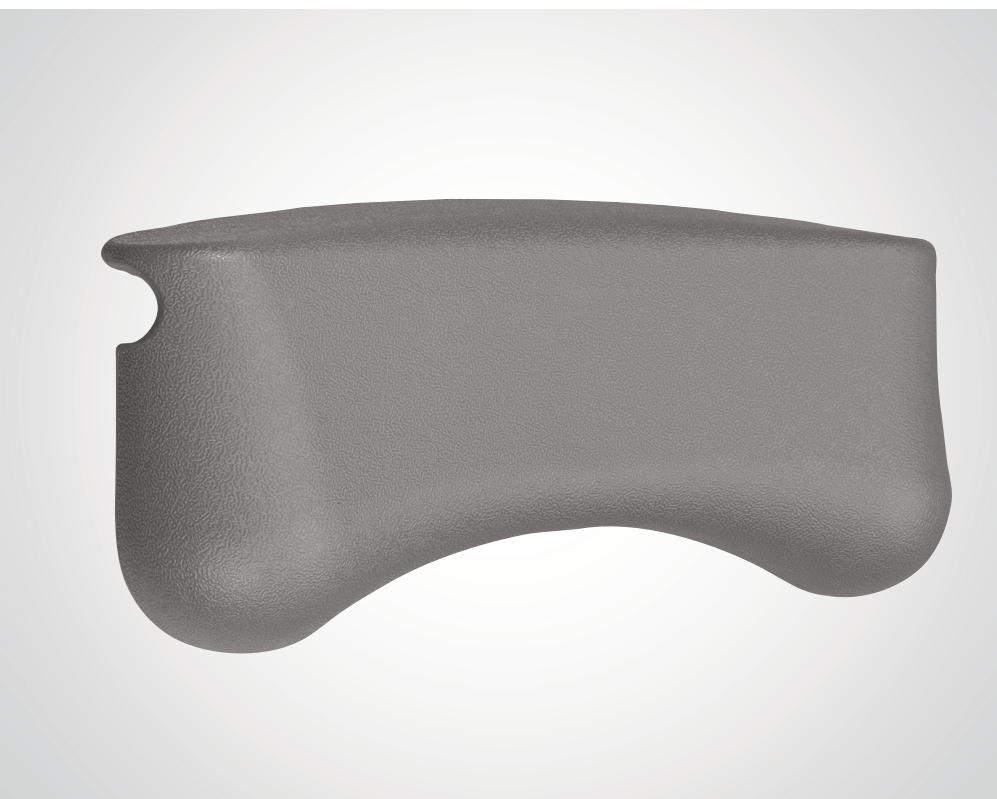

BC5083-34


DOLPHIN SHOWER BACK REST

- > Back rest for folding shower seat, back rest pale grey
- > Includes fixing kit for brick wall
- > Adjustability Fixed mounting
- > Materials The wall profile is made of diecast aluminium, and the backrest is made of vacuummoulded polyethylene (PE)
- > Dolphin five year warranty
- > See BC5083-33 for shower seat

HEIGHT	189 MM
WIDTH	450 MM
PROJECTION	160 MM

PRODUCT CODES

- > BC5083-33 Dolphin Shower Seat
- > BC5083-34 Dolphin Shower Back Rest

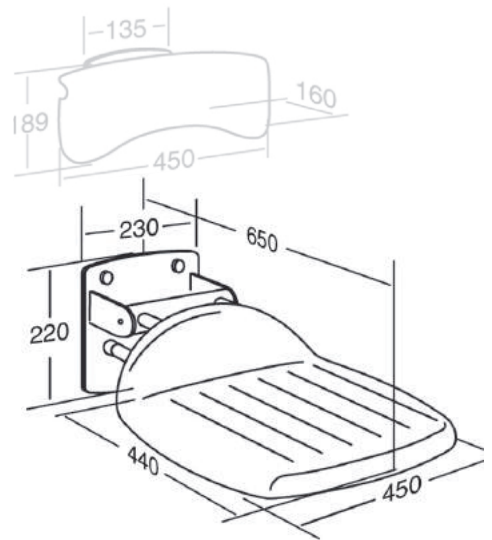

BC5083-33

DOLPHIN SHOWER SEAT

- > Back rest for folding shower seat, back rest pale grey
- > Includes fixing kit for brick wall
- > Fixed mounting
- > The wall profile is made of diecast aluminium, and the backrest is made of vacuummoulded polyethylene (PE)
- > Five year warranty
- > See BC5083-34 for shower back rest

HEIGHT	220 MM
WIDTH	450 MM
PROJECTION	650 MM

PRODUCT CODES

- > **BC5083-33** Dolphin Shower Seat
- > **BC5083-34** Dolphin Shower Back Rest



BC5083-121


STAINLESS STEEL DISABLED ALARM SYSTEM WITH PULL CORD

- › Essential for every public accessible washroom
- › Included in all Dolphin Doc M shower and WC room sets
- › Available in white plastic or satin stainless steel
- › Doc M compliant

PRODUCT CODES

BC5083-120 - White Plastic Disabled Alarm System With Pull Cord

BC5083-121 - Stainless Steel Disabled Alarm System With Pull Cord

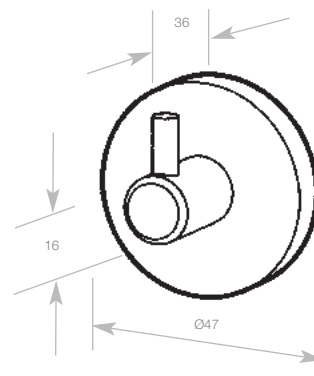

DP7102

DOLPHIN ROBE HOOK



- › Superior quality and timeless design for prestigious washrooms
- › Easy-care 18/10 chrome nickel stainless steel robe hook
- › Anti-theft, robust four-point wall fixing
- › See also DP 7103 double robe hook
- › Available in satin or polished stainless steel

DIAMETER	47 MM
PROJECTION	36 MM

PRODUCT CODES

- › Double hook version of this product see

DP3103

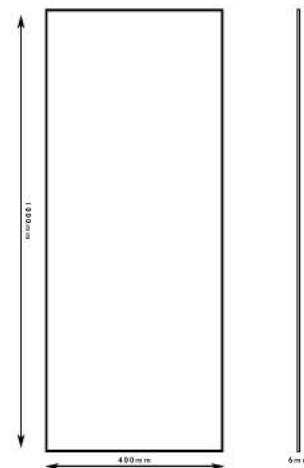
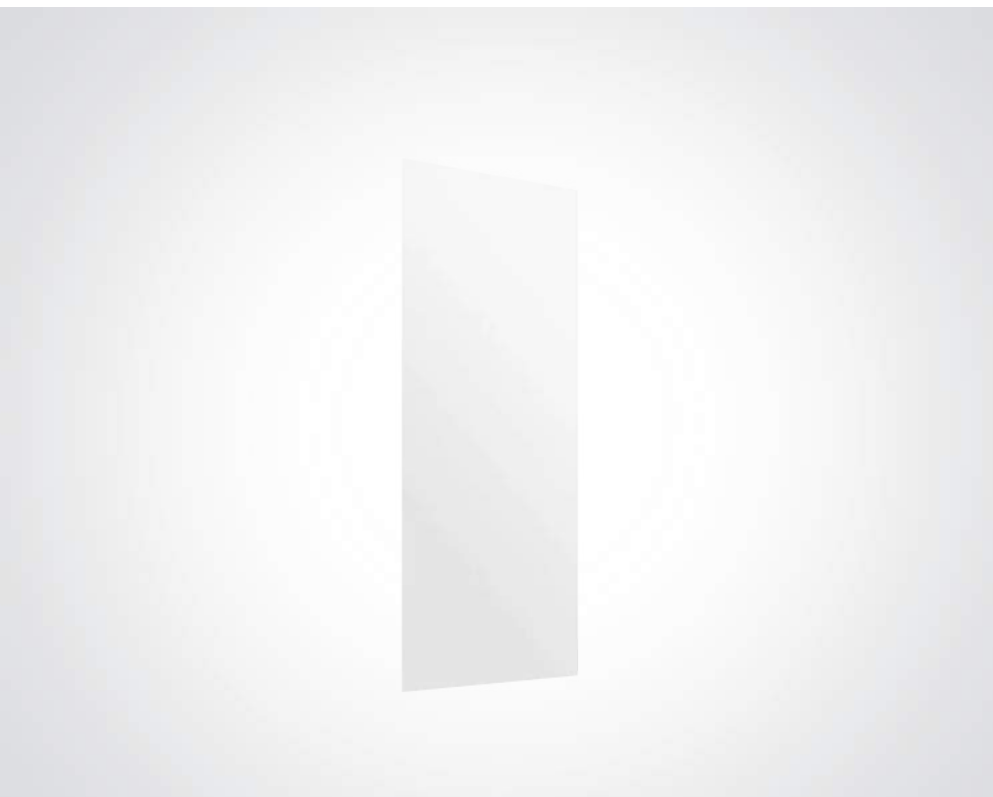


BC5083-101

DOLPHIN SAFETY BACKED MIRROR

- › Safety backed glass mirror
- › Suitable for accessible washrooms and shower rooms
- › 1000mm x 400mm x 6mm
- › Frameless
- › Bespoke options available

HEIGHT	1000MM
WIDTH	400MM
THICKNESS	6MM

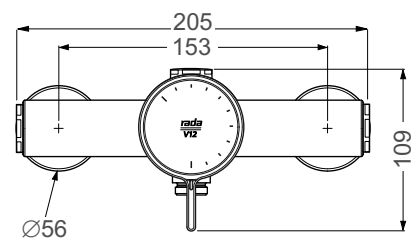


BC5083-15

THERMOSTATIC SHOWER VALVE

- › Buildcert TMV3 Scheme Approved
- › WRAS Approved
- › Single sequential operation from off through cold to warm
- › Light touch control complemented by easy to understand graphics to address the needs of all users irrespective of age or ability
- › Robust construction to withstand heavy usage in the commercial environment
- › Optional 6 l/min flow regulator for increased water savings. A 9 l/min flow regulator is also supplied
- › Easy access to filters for servicing.

WIDTH	205 MM
HEIGHT	109 MM
PROJECTION	122 MM



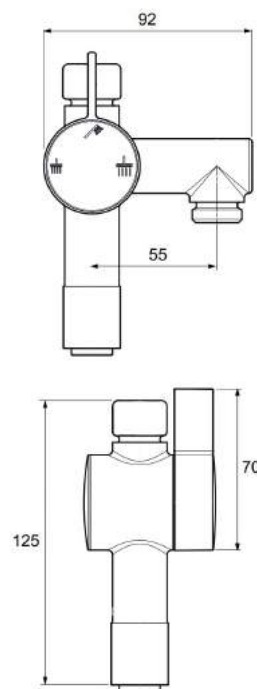

BC5083-16

DOLPHIN EXPOSED SHOWER DIVERTER VALVE

- › Two outlet diverter valve, designed to add extra convenience and flexibility to showering
- › Designed for use with the Rada VI2 Exposed shower valve
- › Simple to use - allows you to divert water between two different outlets off the same shower valve, or to have both running simultaneously
- › Suitable for either high or low pressure systems

PRODUCT CODES

BC5083-16 - Exposed shower diverter


BC5083-15 - Exposed shower valve



BC5083-20

DOLPHIN EXPOSED SHOWER AND SLIDER RAIL

- › Heavy-duty shower rail kit for connection to surface-mounted shower controls
- › Supplied with an adjustable five function handset, flexible hose, clamp bracket assembly and a hose retaining ring.
- › Easy to clean
- › Brass slide bar designed to withstand heavy use
- › Easy to use 5 function handset
- › Suitable for high or low pressure plumbing systems
- › RAC accessory available for built-in shower controls
- › 1.25M flexible hose included
- › Chrome finish

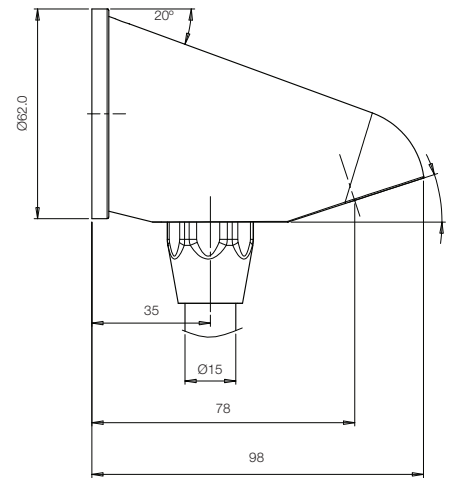


DB I032

DOLPHIN SHOWER HEAD WALL MOUNTED - BOTTOM INLET

- › WRAS Approved product
- › High quality chrome plated solid brass construction.
- › Vandal resistant
- › Standard ½" Bottom Inlet
- › 9 L/M flow restrictor offering excellent water saving especially when used in conjunction with Dolphin Blue Infrared and Piezo Shower Controls. Also available with 7 and 6 L/M flow restrictors
- › To special order:
- › 2 year warranty
- › Ideal for public shower facilities, including: prisons, sport facilities, swimming pools, hospitals and schools.
- › For rear inlet version of this product see DB I031
- › Easy clean nozzles - lime deposits can be rubbed off easily due to soft silicone nozzles.

DIAMETER	62 MM
PROJECTION	98 MM

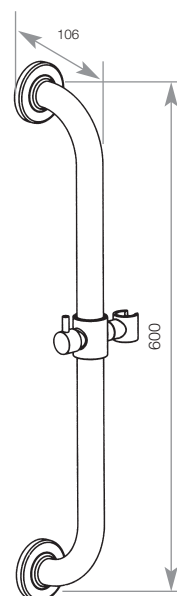

Tube diameter is 32mm

DP601001

DOLPHIN SHOWER RAIL WITH SHOWER RISER

- › Tubes are manufactured in a robust, easy to clean stainless steel, satin or textured finish
- › All rails TÜV certified in accordance with DIN EN 12182, and CE marked in accordance with 93/42 EEC
- › All rails capable of supporting up to 125kg
- › Outer diameter of tubes 32mm for an ergonomic grip
- › Bend radius of 75mm
- › Clearance from wall - 106mm
- › Wall mounting - Grab rails with 4-point mounting plate - Support rails with 6-point mounting plate;
- › All mounting plates 4mm thick
- › Concealed fixings 75mm in diameter; anti-theft, with silicone sealing ring at tube joint

HEIGHT	1000 MM
DIAMETER	32 MM
PROJECTION	106 MM

PRODUCT CODES

› 600mm stainless steel	DP601600
› 800mm stainless steel	DP601800
› 1000mm stainless steel	DP601001
› 1100mm stainless steel	DP601100



BC5083-18

COPPER TUBE FOR USE IN DOLPHIN SHOWER PACKS

- › Cu-DHP grade copper
- › Suitable for any plumbing, heating and gas installation
- › Meets BS EN1057
- › BSi Kitemark licensed
- › 15mm diameter, 0.7mm thick copper tubing
- › Offers easy manipulation due to half-hard condition
- › Able to withstand high internal pressures,
- › Suitable for use with hot and cold water
- › Supplied in a 1500mm length.

LENGTH	1500MM
DIAMETER	15MMMM
WALL THICKNESS	0.7MM