
BC5065

GRAB RAIL

Installation Instructions

BEFORE YOU START

- › Dolphin Grab rails are designed and tested to support loads up to 150kg, provided they are installed on suitable plywood.
 - › Confirm the rail position meets the required mounting height and clearance for the intended user.
 - › Tools required: drill, cross-head screwdriver, rail (BC5065) and the Allen key supplied.
-


PARTS SUPPLIED

- › 2 x Mounting brackets (rose)
- › 2 x End caps
- › 1 x Rail
- › 1 x Allen key

INSTALLATION STEPS


01 MARK AND DRILL

Mark the fixing centres on the wall. Drill a hole at each fixing point, sized to suit your chosen wall fixing.




02 INSERT WALL FIXING

Push the wall fixing fully into each drilled hole until flush with the wall surface. Have the retaining screw ready for the next step.

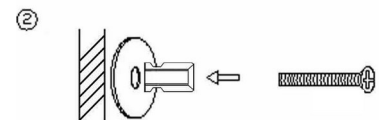

03 FIX THE BRACKET


Position the mounting bracket over the wall fixing and secure with a retaining screw. Tighten with a cross-head screwdriver until firm.



04 FIT THE END CAP

Slide the end cap onto the mounting bracket at each end, ensuring a secure, flush fit against the wall.

④

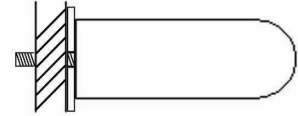

05 FIT THE RAIL

Insert the rail into the end caps at both ends. Using the Allen key supplied, tighten the locking screw at each end to secure the rail in place.



AFTER INSTALLATION

- › Check the rail is secure and does not move under load before use.
- › Re-check tightness of all screws after the first week of use, and periodically thereafter.